

Rubber Bellow Compensator




Features :



- High absorption of mechanical and sonorous vibration
- Sealing of joints by end connections are loose to allow for ease of alignment
- Electrical discontinuity
- Resistance to heat, water, weather and other severe atmospheric conditions

Typical Applications :

- Air conditioning systems, Pumps, air compressors, blowers, etc.
- Industrial piping systems
- Marine piping systems
- Sanitary systems
- Any piping system where it is necessary to compensate for thermal displacements or vibration

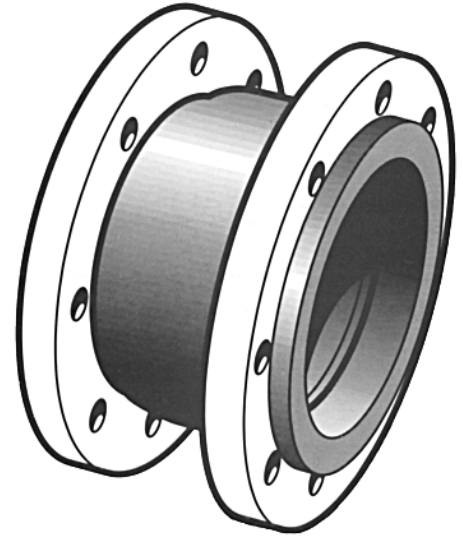

Nominal Dia (D)		Length Options (L)			Pressure Rating Kg/cm ²	Allowable Movement			
Inch	mm	mm	mm	mm/inch		Axial Compression	Axial Elongation	Transverse Movement	Angular Deflection
1	25	95	—	150/6	16				
1 1/4	32	95	—	150/6	16	8	4	8	15°
1.5	40	95	130	150/6	16	8	4	8	15°
2	50	105	130	150/6	16	8	5	8	15°
2.5	65	115	130	150/6	16	12	6	10	15°
3	80	—	130	150/6	16	12	6	10	15°
4	100	135	130	150/6	16	18	10	12	15°
5	125	170	130	150/6	16	18	10	12	15°
6	150	180	130	150/6	16	18	10	12	15°
8	200	205	130	150/6	16	25	14	22	15°
10	250	240	130	205/8	16	25	14	22	15°
12	300	260	130	205/8	10	25	14	22	15°
14	350	—	265	205/8	10	25	16	22	15°
16	400	—	265	205/8	10	25	16	22	15°
18	450	—	265	205/8	10	25	16	22	15°
20	500	—	265	205/8	10	25	16	22	15°
24	600	254	265	205/8	10	19	13	19	15°

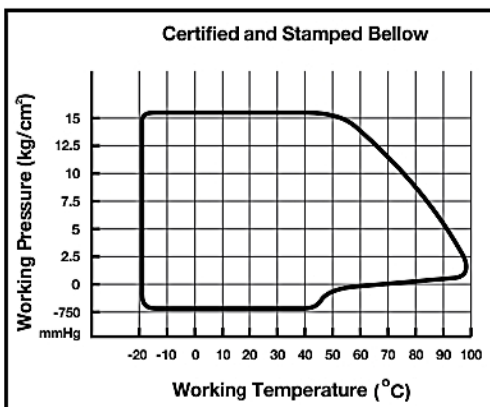

Rubber		Identification Circular Coloured Labels
Internal	External	
Chloroprene	Chloroprene	Black
EPDM	EPDM	Red
Nitrile (BunaN)	Chloroprene	Yellow
Hypalon	Chloroprene	Green
Natural	Chloroprene	Grey

Intermech Sealing Solutions (Pty) Ltd

63 Van Den Dool Rd, Nuffield, Springs, Gauteng // PO Box 11408, Selcourt, Springs, Gauteng

Tel: +27 11 818 2372 // Fax: +27 11 363 2989

www.intermech.net // info@fluidseal.co.za